

Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T/LCP+30%G, F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G, F UL94V-0, Color: Black

端子: 黃銅

Contact: Brass

2. 特性 (characteristics):

額定電流: 2.0AMP

Rating Current: 2.0AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min

Insulating Resistance: 1000 MΩ Min

耐電壓: AC 500V/分钟

Withstanding Voltage: AC 500V/Minute

溫度範圍: -40° C to +105° C

Temperature Range: -40° C to +105° C



PH200-24ZXXXXXXXXX1

$L=B1+C+(W-2.0)/2-2.8$



PH200-24ZXXXXXXXXX2

$L=B1+C+(W-2.0)/2-2.8$

Mating With/配對母座:

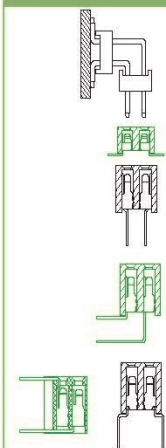

Recommended P.C.B Layout

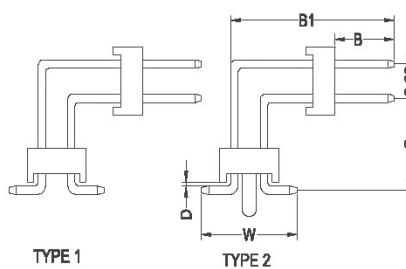

TYPE 1

TYPE 2

Dimension antitheses list						
ITEM	B	B1	C	D	W	H
Standard	2.0/3.0/4.0			0.10	6.50	1.0 2.0
Alternate						1.5 2.5

PIN HEADER

PH200-24

Z

XX

No. Of Pins
Per Row
02~40P

XX

Contact Plating
Full Of Gold
G0=0.8u"

G9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

XXX

Length Of
Terminal

X

Packing
A: PE Bag
R: Tape & Reel
T: Tube
D: Tube+CAP
E: Tray

X

Journal Number
1: Type1 (without Post)
2: Type2 (with Post)